



## BOLDEN SOLVENT BASE SB

Bituminous protective primer, solvent based D 41

### DESCRIPTION

Bolden SB is a premium quality, quick drying solvent based bitumen primer. It acts as a primer and sealer coat for masonry and concrete to improve the bonding of bituminous materials.

### USES

Used as a primer coat prior to the application of bituminous waterproofing membranes.

### ADVANTAGES

- Binder for dust particles.
- Improves the bond of bituminous materials.
- Cold applied, does not require heating, thinning and mixing.
- Anti corrosive
- Anti-Bacterial and Anti-Fungus

ASTM D 41 Asphalt primer for roofing, damp proofing and waterproofing BS 3416 Bitumen based coating for cold application, suitable for use in contact with potable water.

### APPLICATION

The surface need to be clean and free of oil, grease and any other loosely adhering particles. The surface need to be dry before priming with Bolden SB. The primer can be applied straight from the container with standard brushes, squeegees, roller or spray equipment. The primer should be allowed to dry naturally before the application of subsequent layers

### COVERAGE

5-6 m<sup>2</sup>/Liter/coat However the coverage will depend on the porosity of the substrate. In order to ascertain the exact coverage, it is suggested a trial application is carried out at site.

### PROPERTIES

**Specific Gravity:** 0.88-0.89 at 25oC

**Color:** Black liquid

**Solids :** 45-50%

**Drying time:** 1-2 Hours in normal atmospheric temperature.


**Solvent type:** Petroleum solvent





## BOLDEN SOLVENT BASE SB

Bituminous protective primer, solvent based D 41

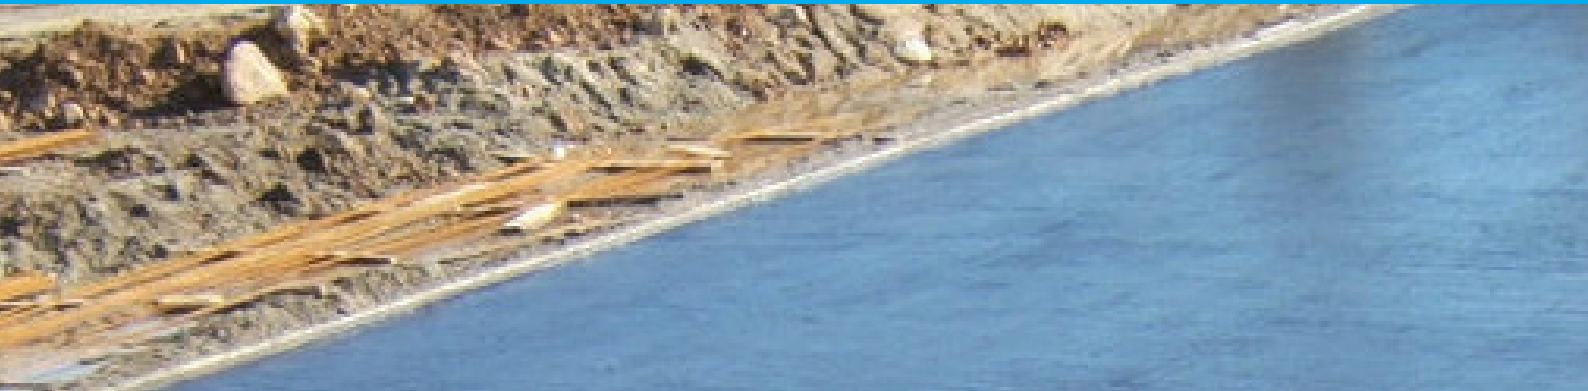

### SHELF LIFE

Minimum 12 months in sealed original containers under recommended storage conditions

### PACKING

15 liters per Pail

### STORAGE

The drums should be stored under a shaded area, away from direct sunlight and protected from extreme temperature. The shelf life of the product is up to 12 months if stored as per the recommended. Failure to comply with the instruction may result in premature deterioration of the product.

### HEALTH & SAFETY

Bolden SB contains volatile solvent with a low flash point (38 C0). It should be kept far away naked from flame and flame. Avoid inhalation of vapors and ensure there is adequate ventilation in the work place. Gloves, protective masks and goggles should be worn during application. If swallowed seek medical attention immediately.

### INFORMATION

Al majara polychem industries LLC products are guaranteed against defective materials and are sold subject to standard terms and condition of sale, copies of which are available on request which are reasonable care it's taken compiling this technical data sheet, all recommendations regarding the use of product are made without guarantee since the conditions are use the beyond the company' direct control. It is the customer responsibility to satisfy themselves that each product is fit for the purpose for which they indent to use it.

